

Combi-arm for configuration of RFF-arm with optional suspension and extraction hoods according to the options below.

Available in 2 - 4m-versions, $\varnothing 125$ - $\varnothing 200$ mm. Extension arms are available - see price list.

Selection of suspension


Console $\varnothing 125$ - $\varnothing 200$ mm



Ceiling bracket/pipe $\varnothing 125$ - $\varnothing 200$ mm
Length: 300 - 2000mm



Special console with flange $\varnothing 160$ - $\varnothing 200$ mm for exhaust channel type SSK and table mounting.

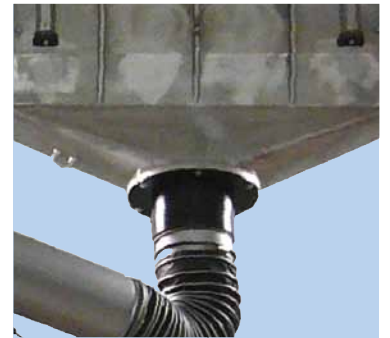

Selection of parallelogram



Selection of extraction hood



Extraction hood type ST-S with damper in $\varnothing 125$ - $\varnothing 200$ mm.



Extraction slot $\varnothing 160$ mm
Length: 500 - 1500mm



Cupola extraction hood type POLY in clear polycarbonate with damper in $\varnothing 125$ - $\varnothing 160$ mm.

For further information we refer to data sheet for extraction arm type RFF!