



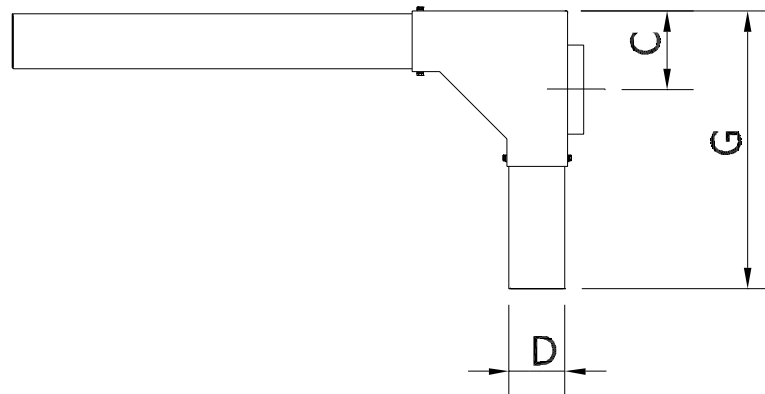

PU

- Suitable for extraction at grinding with angle or eccentric grinder
- Excellent for capture of metal dust
- Steel construction with extraction gabs
- Standard construction with back and side wall connected in an angle
- Special dimensions are available (divisible by 250mm)
- Cleaning of PU is performed easily by dismantling sides of corner module
- Is available with connection in top or bottom of corner on panel type PU against additional payment

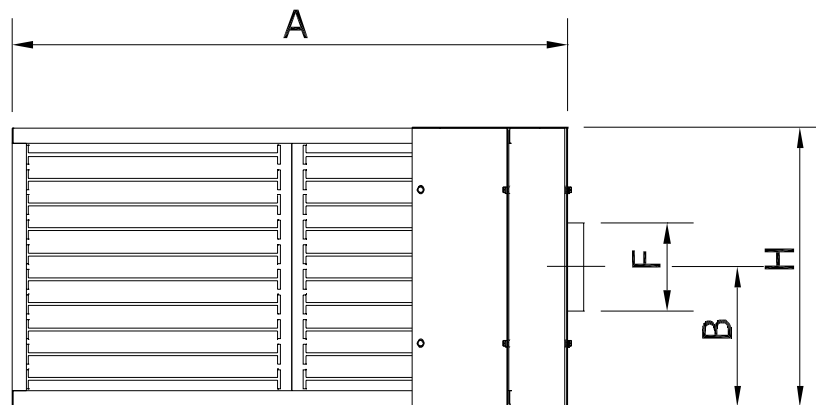

Order no.	A	B	C	D	F	G	H	Weight [kg]	ΔP [Pa]	Minimum [m ³ /h]
02 182 000	1000	250	140	100	ø160	500	500	19	900	1350
02 180 000	1000	250	140	100	ø160	1000	500	39	900	1800
02 181 000	2000	250	140	100	ø200	1000	500	54	900	2700

Colour: RAL 5007 (structure)