



UP 1000 - 3000

Extraction panel for suction of dust and fumes in connection with paint and grinding extraction

UP: Pressure drop: Max. 800Pa

Description

- Sizes: Up to 2000x3000mm
- Is standard equipped with Andraee-filter. Thereby the air is distributed over the whole panel surface
- Is available with paintstop-filters or steel lamellas
- Extraction panel with suction in front and connection to piping in top

Photo	Product	Order no.
	Filter cassette with steel lamellas	
	990 x 900 x 50mm	02 403 350
	1490 x 900 x 50mm	02 404 350
	Filter cassette with paintstop-filter	
	987 x 900 x 50mm	02 403 000
	1487 x 900 x 50mm	02 404 000


Is also available:

To avoid loss of extraction ability around process, the wall can be delivered with side walls and top (see next page):

- Side wall set with 1m width
- Top* with 1m width

* Requires side wall set

Colour: RAL 5007 (structure)

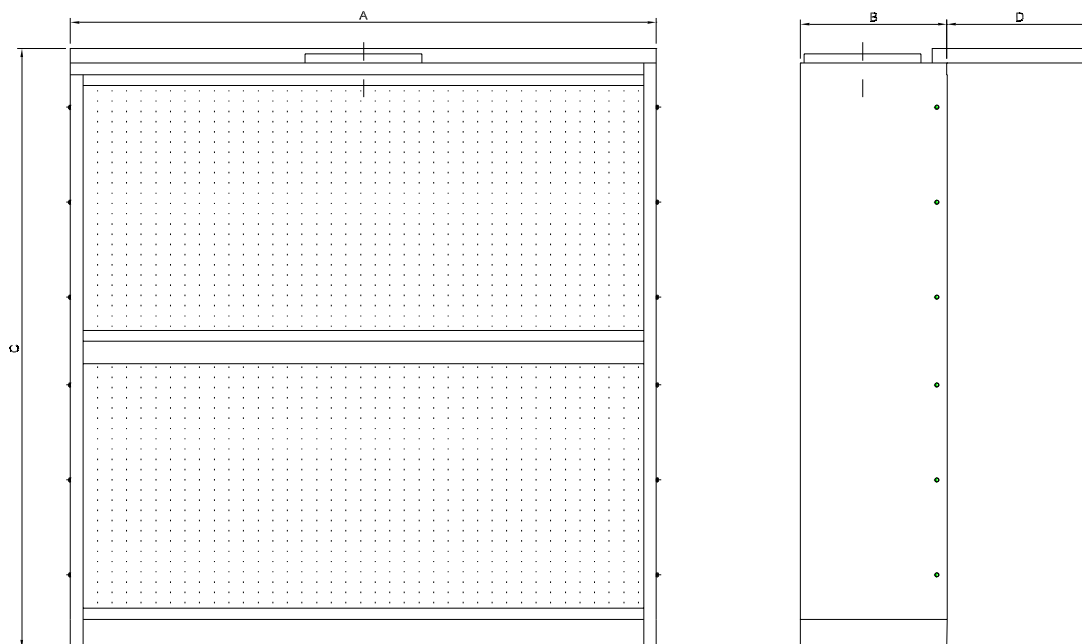

Type	Order no.	A	B	C	Outlet [ø]	Air volume* [m³/h]	△ P Start/Stop [Pa]
UP 1000/1000	02 405 000	1000	300	1000	ø200	1800	300/400
UP 1500/1000	02 410 000	1500	300	1000	ø200	2700	300/400
UP 2000/1000	02 415 000	2000	300	1000	ø250	3600	300/400
UP 1500/2000	02 450 000	1500	500	2000	ø315	5400	300/400
UP 2000/2000	02 455 000	2000	500	2000	ø400	7200	300/400
UP 3000/1000	02 465 000	3000	500	1000	ø315	5400	300/400
UP 3000/2000	02 460 000	3000	600	2000	ø500	10800	300/400

* Air volume is calculated as 0.5 m/sec. in extraction area.

Option	Order no.	Panel size	D [mm]
Side wall set	02 425 000	1000 x 1000	1000
		1500 x 1000	
		2000 x 1000	
		3000 x 1000	
Side wall set	02 426 000	1500 x 2000	1000
		2000 x 2000	
		3000 x 2000	
Top**	02 435 000	1000 x 1000	1000
Top**	02 438 000	1500 x 1000	1000
		1500 x 2000	
Top**	02 441 000	2000 x 1000	1000
		2000 x 2000	
Top**	02 444 000	3000 x 1000	1000
		3000 x 2000	

** Requires side wall set

Rev. 03.21 Data is subject to alterations